



Trusted Since 1860



FULLER BATTERY ±

Automotive Range



Features & Benefits



OEM Specification

Excellent cold start performance and advanced lead calcium technology ensures extended service life and reliable starting all year round.

Full range of batteries

With a wide variety of batteries, the Fuller automotive range covers almost every car.

Maintenance Free

Entire range of maintenance free batteries, meaning no top up and no hassle.

Since 1860

Vast experience within the battery industry & trusted by many since 1860.

FULLER
BATTERY+
Trusted Since 1860



Range Overview

Part No.	Voltage (V)	Capacity (Ah)	CCA	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Layout	Terminal	Hold Down
Standard Lead Acid Range										
002L	12	40	360	10.5	175	175	190	0	T1	B13
002R	12	40	360	10.5	175	175	190	1	T1	B13
054	12	40	330	9.3	187	127	227	0	T1/T3	N
055	12	40	330	9.3	187	127	227	1	T1/T3	N
056	12	36	330	9.3	187	136	227	0	T1/T3	B1
034	12	35	272	10.5	197	129	227	1	T3	N
034L	12	35	272	10.5	197	129	227	0	T3	N
004	12	50	450	12.9	202	173	225	1	T1	N
008	12	50	450	12.9	202	173	225	0	T1	B1
063	12	45	470	11.6	207	175	175	0	T1	B13
077	12	45	380	12.7	207	175	190	1	T1	B13
012	12	52	450	13.3	207	175	190	0	T1	B13
048	12	45	300	13.7	220	135	225	0	T1	B1
049	12	45	300	15.8	220	135	225	1	T1	B1
005L	12	60	450	15.5	230	173	225	0	T1	N
014	12	60	450	15.5	231	173	225	1	T1	N
053	12	45	400	12.4	238	129	225	0	T1/T3	N
057	12	45	400	12.4	238	129	225	1	T1/T3	N
157/046	12	45	400	12.7	238	129	227	1	T3	N
075	12	62	570	14.4	245	175	175	0	T1	B13
078	12	60	550	16	243	175	190	1	T1	B13



Range Overview

Part No.	Voltage (V)	Capacity (Ah)	CCA	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Layout	Terminal	Hold Down
027	12	60	550	16	243	175	190	0	T1	B13
030	12	70	570	18.4	258	173	225	0	T1	N
031	12	70	570	18.4	258	173	225	1	T1	N
038	12	35	330	11.1	243	135	202	1	T1	B12
068	12	70	570	17.3	258	173	225	0	T1	B9
072	12	70	570	18.8	258	173	206	1	T1	N
069	12	72	595	17.3	269	174	223	1	T1	B9
100	12	71	650	17.1	278	175	175	0	T1	B13
086	12	76	660	19	278	175	190	1	T1	B13
096	12	76	660	19	278	175	190	0	T1	B3
334	12	95	700	20.8	303	174	222	1	T1	B1
335	12	95	700	20.8	303	174	222	0	T1	B1
110	12	80	720	17.2	317	175	175	0	T1	B13
017	12	90	880	21.8	354	175	175	0	T1	B13
019	12	98	890	24	354	170	190	0	T1	B13
020	12	110	900	26.3	392	175	190	0	T1	B13
Lawnmower Range										
895	12	30	330	7.8	194	126	183	0	T4	N
896	12	30	330	7.8	194	126	183	1	T4	N



Range Overview

Part No.	Voltage (V)	Capacity (Ah)	CCA	Weight (kg)	Length (mm)	Width (mm)	Height (mm)	Layout	Terminal	Hold Down
EFB Battery Range										
054 EFB	12	40	340	10.7	197	128	227	0	T1/T3	N
055 EFB	12	40	340	10.7	197	128	227	1	T1/T3	N
005 EFB	12	64	620	16.8	232	173	225	0	T1	N
027 EFB	12	60	560	16.6	242	175	190	0	T1	B13
030 EFB	12	72	760	19.3	260	173	225	0	T1	N
053 EFB	12	45	370	13	238	128	227	0	T1/T3	N
096 EFB	12	70	680	19.3	278	175	190	0	T1	B13
100 EFB	12	65	650	17.4	278	175	175	0	T1	B13
335 EFB	12	80	780	22.5	305	173	225	0	T1	N
110 EFB	12	75	730	19.8	317	175	175	0	T1	B13
115 EFB	12	80	730	20.8	317	175	190	0	T1	B13
AGM Battery Range										
012 AGM	12	50	520	15.9	207	175	190	0	T1	B13
027 AGM	12	60	680	17.7	243	175	190	0	T1	B13
096 AGM	12	70	760	20.5	278	175	190	0	T1	B13
110 AGM	12	80	800	23.2	315	175	190	0	T1	B13
019 AGM	12	95	850	25.6	278	175	190	0	T1	B13
020 AGM	12	105	950	29	392	175	190	0	T1	B13




Specifications


Terminal Layouts



Terminal Types

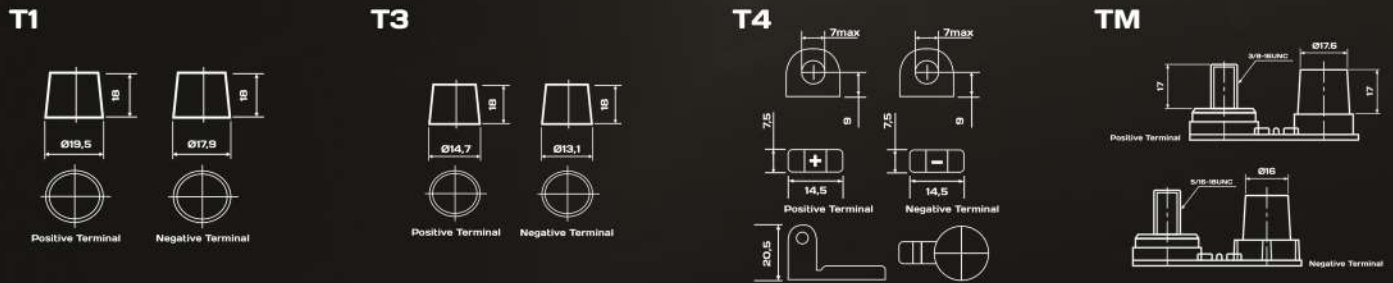

Hold Downs

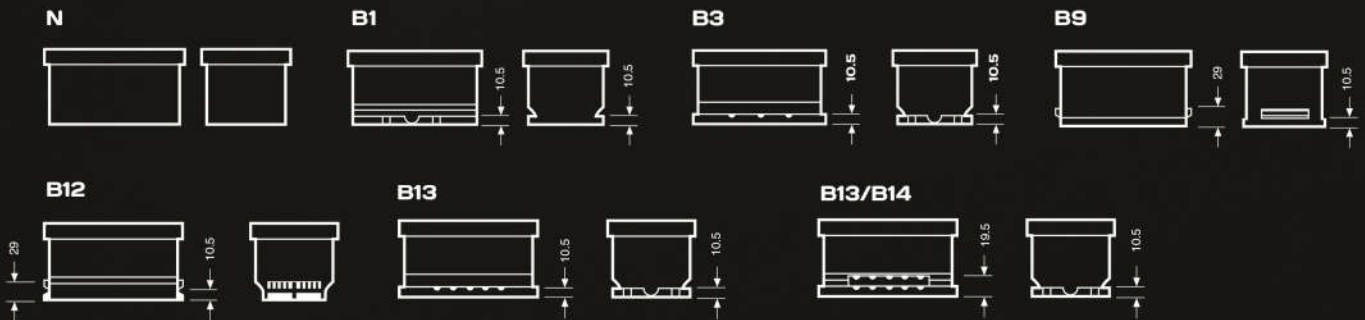



FULLER
BATTERY 

Trusted Since 1860

www.fullerbattery.co.uk